


---

# IMMERSION AWASH ARCTIC WHITE (C) *Glass*

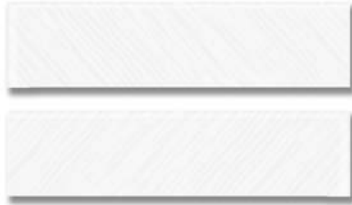

PART NUMBER  
GL1512-AWASCO

AVAILABILITY  
IN STOCK

DIMENSIONS  
3" x 12" = .25 sqft (+/-)

THICKNESS  
5/16"

PROFILE  
TILES

GROUT JOINT  
1/8"

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	Yes	Yes	Yes	Yes	No

## TECHNICAL DATA


FEATURES	SPECIFICATION	STANDARD
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

---

# IMMERSION AWASH DOVE GRAY *Glass*

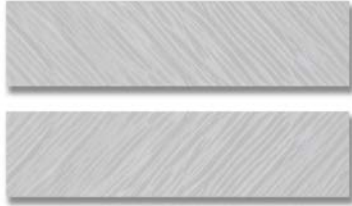

PART NUMBER  
**GL1815-AWASCO**

AVAILABILITY  
**IN STOCK**

DIMENSIONS  
**3" x 12" = .25 sqft (+/-)**

THICKNESS  
**5/16"**

PROFILE  
**TILES**

GROUT JOINT  
**1/8"**

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	Yes	Yes	Yes	Yes	No

## TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

---

# IMMERSION AWASH VOYAGE BLUE (METALLIC) *Glass*



PART NUMBER  
GL2100-AWASCO

AVAILABILITY  
IN STOCK

DIMENSIONS  
3" x 12" = .25 sqft (+/-)

THICKNESS  
5/16"

PROFILE  
TILES

GROUT JOINT  
1/8"

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No

## TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

---

# IMMERSION CRYSTALLITE PEAK WHITE (METALLIC) *Glass*



PART NUMBER  
**GL2101-CRSTCO**

AVAILABILITY  
**IN STOCK**

DIMENSIONS  
**12.75" x 8.78" = .78 sqft (+/-)**

THICKNESS  
**5/16"**

PROFILE  
**MOSAICS**

GROUT JOINT  
**1/8"**

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No

## TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

# IMMERSION CRYSTALLITE SILVER SILK (METALLIC) *Glass*



PART NUMBER  
GL2102-CRSTCO

AVAILABILITY  
IN STOCK

DIMENSIONS  
12.75" x 8.78" = .78 sqft (+/-)

THICKNESS  
5/16"

PROFILE  
MOSAICS

GROUT JOINT  
1/8"

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No

## TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

# IMMERSION CRYSTALLITE VOYAGE BLUE (METALLIC) *Glass*



PART NUMBER  
GL2100-CRSTCO

AVAILABILITY  
IN STOCK

DIMENSIONS  
12.75" x 8.78" = .78 sqft (+/-)

THICKNESS  
5/16"

PROFILE  
MOSAICS

GROUT JOINT  
1/8"

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No

## TECHNICAL DATA


FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

---

## IMMERSION UNDERTOW PEAK WHITE (METALLIC) *Glass*

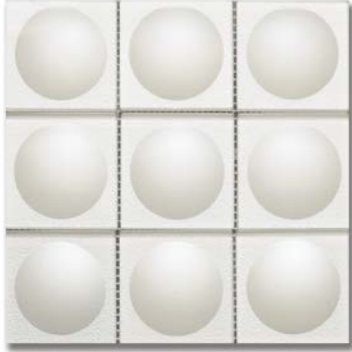

PART NUMBER  
GL2101-UNDCVX

AVAILABILITY  
IN STOCK

DIMENSIONS  
8.88" x 8.88" = .55 sqft (+/-)

THICKNESS  
5/16"

PROFILE  
MOSAICS

GROUT JOINT  
1/8"

### ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No


### TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).

IMMERSION UNDERTOW SILVER SILK (METALLIC) *Glass*

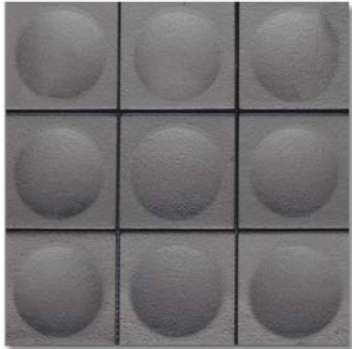

PART NUMBER <b>GL2102-UNDCVE</b>	PROFILE <b>MOSAICS</b>
AVAILABILITY <b>IN STOCK</b>	GROUT JOINT <b>1/8"</b>
DIMENSIONS <b>8.88" x 8.88" = .55 sqft (+/-)</b>	
THICKNESS <b>5/16"</b>	

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No

TECHNICAL DATA


FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).



# IMMERSION UNDERTOW VOYAGE BLUE (METALLIC) *Glass*

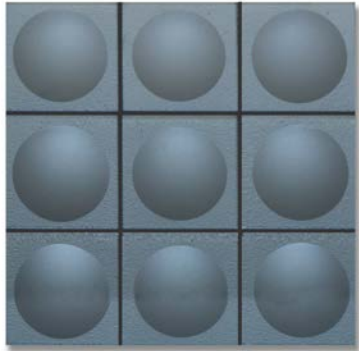

PART NUMBER  
GL2100-UNDCVX

AVAILABILITY  
IN STOCK

DIMENSIONS  
8.88" x 8.88" = .55 sqft (+/-)

THICKNESS  
5/16"

PROFILE  
MOSAICS

GROUT JOINT  
1/8"

## ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	No

## TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Heat Resistance	Heat not to exceed 293° F	96/603/CE
TRAFFIC	Wall Only	NA

DUE TO THE INHERENT CHARACTERISTICS OF GLASS THERE MAY BE VARIATIONS IN COLOR, MOVEMENT AND TEXTURE FROM LOT TO LOT.

For detailed installation instructions, visit [akdo.com](http://akdo.com).