

EXCALIBUR ARMOR GILDED *Metal*



PART NUMBER
AL2257-ARMR00

AVAILABILITY
IN STOCK

DIMENSIONS
11.88" x 12" = .99 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAICS

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	Yes	No	No

TECHNICAL DATA


FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-EN-ISO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR ARMOR SHINING *Metal*

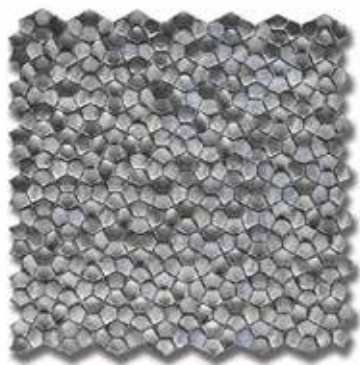

PART NUMBER
AL2259-ARMR00

AVAILABILITY
IN STOCK

DIMENSIONS
11.88" x 12" = .99 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAICS

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	Yes	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-ENHSO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR ARMOR KNIGHT *Metal*



PART NUMBER
AL2258-ARMR00

AVAILABILITY
IN STOCK

DIMENSIONS
11.88" x 12" = .99 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAICS

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	Yes	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-EN-ISO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR SHIELD GILDED *Metal*



PART NUMBER
AL2257-SHLD00

AVAILABILITY
IN STOCK

DIMENSIONS
11.38" x 11.88" = .94 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAICS

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	Yes	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-EN-ISO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR SHIELD SHINING *Metal*



PART NUMBER
AL2259-SHLD00

AVAILABILITY
IN STOCK

DIMENSIONS
11.38" x 11.88" = .94 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAICS

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	Yes	No	No

TECHNICAL DATA


FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-ENHSO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR SHIELD KNIGHT *Metal*

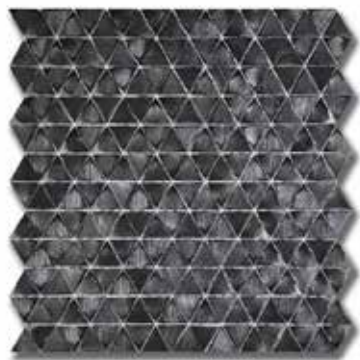

PART NUMBER
AL2258-SHLD00

AVAILABILITY
IN STOCK

DIMENSIONS
11.38" x 11.88" = .94 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAICS

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	Yes	No	No

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-ENISO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR JOUST GILDED *Metal*



PART NUMBER
AL2257-JOUS00

AVAILABILITY
IN STOCK

DIMENSIONS
9.45" x 10.94" = .718 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAIC

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-EN-ISO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE
TRAFFIC	Wall Only	NA

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.

EXCALIBUR JOUST SHINING *Metal*



PART NUMBER
AL2259-JOUS00

AVAILABILITY
IN STOCK

DIMENSIONS
9.45" x 10.94" = .718 sqft (+/-)

THICKNESS
3mm

PROFILE
MOSAIC

VARIATION
LOW

GROUT JOINT
1/16"

SEALER
GROUT ONLY

ENVIRONMENTS

WALL	FLOOR	INTERIOR	EXTERIOR FREEZE/THAW	STEAM SHOWER	WET AREA	POOL	REPEAT
Yes	No	Yes	No	No	No	No	

TECHNICAL DATA

FEATURES	SPECIFICATION	STANDARD
Frost resistance	No	UNE-EN-ISO-10545-12
Heat Resistance	HEAT NOT TO EXCEED 392° F	96/603/CE
TRAFFIC	Wall Only	NA

METAL MOSAICS DO NOT NEED TO BE SEALED, HOWEVER CHECK WITH YOUR GROUT MANUFACTURER TO SEE IF YOUR GROUT SHOULD BE SEALED.

WHEN USING METALS IN A BACKSPLASH DESIGN, INCLUDE A 4" SPLASH GUARD OF WET AREA APPROPRIATE MATERIAL IN AREAS WHERE WATER MAY POOL, SUCH AS BEHIND FAUCETS.

For detailed installation instructions, visit akdo.com.